


D. SHEBERLA,* S. PATRA, Y. H. WIJSBOOM, S. SHARMA, Y. SHEYNIN, A.-E. HAJ-YAHIA, A. H. BARAK, O. GIDRON, M. BENDIKOV (WEIZMANN INSTITUTE OF SCIENCE, REHOVOT, ISRAEL)

Conducting Polyfurans by Electropolymerization of Oligofurans

Chem. Sci. **2015**, *6*, 360–371.

Electropolymerization Furnishes Conducting Polyfuran Films

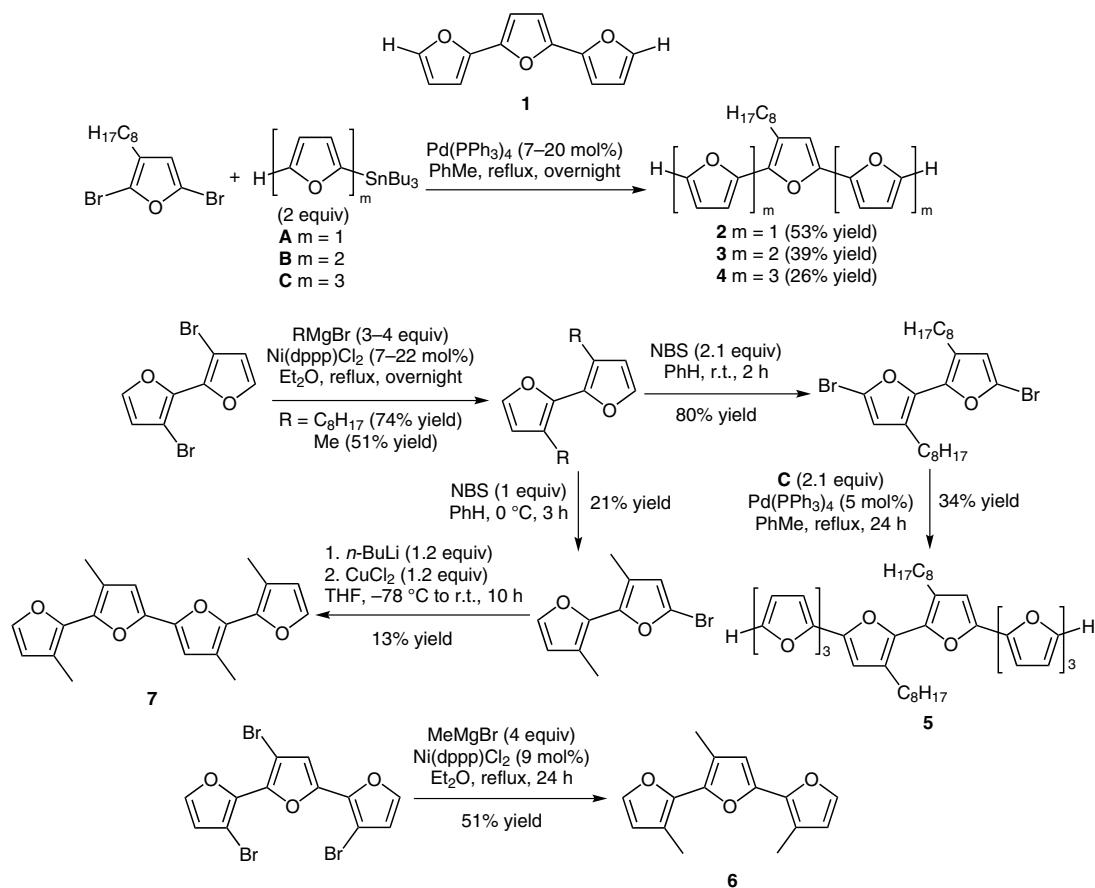

Significance: Polyfurans have received less research attention than their pyrrole and thiophene analogues. This is due in part to the high oxidation potential of furan. Harsh electropolymerization conditions result in defect-rich, non-conducting polyfuran. To lower the potential required to form polyfuran, Sheberla and co-workers synthesize oligofurans **1–7**. Potentiostatic polymerization for all of these monomers occurs at 0.75 V (vs. Ag/AgCl). The resulting polyfurans are found to have conductivities comparable with electropolymerized polythiophenes.

SYNFACTS Contributors: Timothy M. Swager, Sibio Lin
Synfacts 2015, 11(1), 0038 Published online: 15.12.2014
DOI: 10.1055/s-0034-1379665; **Reg-No.:** S12414SF

Comment: Electropolymerization of furan occurs at potentials in excess of 1.8 V (vs. Ag/AgCl). The onset oxidation potentials for **1–7** are under 0.7 V, and follow expected trends based on conjugation length and degree of alkyl substitution. The high-quality polyfurans also undergo oxidative doping at lower potentials than analogous poly(terthiophene)s, resulting in increased stability under the operating conditions. This study may establish polyfuran as a competitor to other conducting polymers.